

TAPE EDGE COMPOSER (TEC) GUMMED TAPE

Join and repair green veneer

TAPE EDGE COMPOSER (TEC) GUMMED TAPE is a special heat activated paper tape to provide strong join within a second. It has excellent water resistant, stay on and strong even after drying process therefore can prevent overlap defects on core veneer.

TAPE EDGE COMPOSER (TEC) GUMMED TAPE will increase productivity and production recovery compared top conventional holt melt composer.

- ✓ Heat activated tape
- ✓ Excellent water resistant
- ✓ Strong adhesion even after dryer
- ✓ Prevent overlap defects on core veneer

APPLICATION

Refer to TEC Machine operating instruction manual.


STORAGE

Store putty in cool dry place and away from heat. Close the lid tightly after use.

Shelf Life: 1 year

PACKAGING

1 Box (240 rolls)

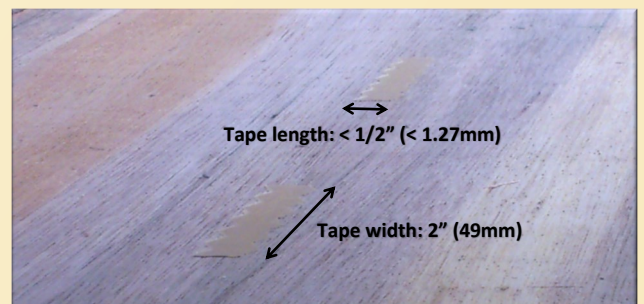

Tape Size: 49mm x 550m per roll

Remarks:

Other size can be customize upon requests